


Reference Thermometer

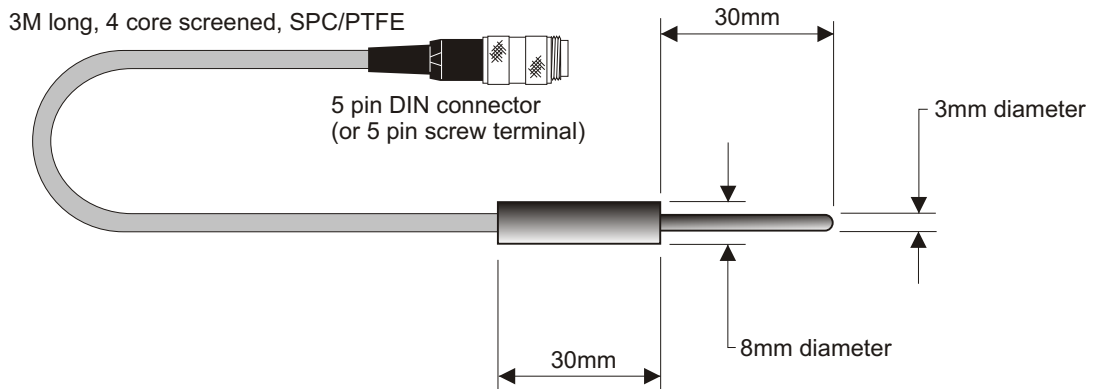

specification

Temperature range	-50°C to +200°C
Resistance at 0°C	100 ohms to IEC751 class B
Temperature coefficient	0.00385 ($\alpha_{0.100}$)
Sheath material	Stainless steel
Sealing	Double sealed against moisture ingress
Recommended measuring current	0.5 or 1 mA

**-50°C to
+200°C**

order codes

T100-200-1D	Supplied with 5 pin DIN plug
T100-200-1T	Supplied with 5 pin screw terminal (suitable for F250 rear panel connection)

For alternative sizes and/or calibration points, contact ASL or your local distributor

AUTOMATIC SYSTEMS LABORATORIES

275 King Henry's Drive, New Addington,
Croydon, CR0 0AE, UK.

Tel: +44 (0)1689 800799

Fax: +44(0)1689 800405

email: sales@aslltd.co.uk

web: www.aslltd.co.uk