


Reference Thermometer

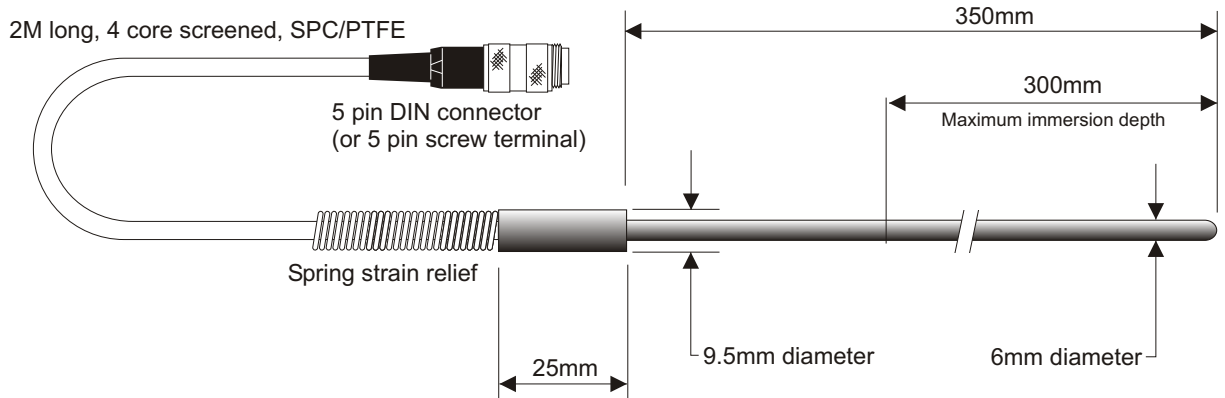

specification

Temperature range	-70°C to +450°C
Resistance at 0°C	100 ohms to IEC751 class B
Temperature coefficient	0.00385 ($\alpha_{0.100}$)
Sheath material	Stainless steel
Recommended measuring current	0.5 or 1 mA
Self heating error in still water at 0°C	Typically 5mK at 1 mA measuring current
Self heating error in still air at 0°C	Typically 7mK at 1mA measuring current
Response time in water (1m/sec)	Typically 8.5 seconds to 63% of final temperature
Response time in air (1m/sec)	Typically 85 seconds to 63% of final temperature

**-70°C to
+450°C**

order codes

T100-450-1D	5 pin DIN plug fitted.
T100-450-1D-NAM	As above but with UKAS calibration at -70, 0, +100 & +450°C
T100-450-1S	SMART plug fitted (suitable for use with F200)
T100-450-1S-NAM	As above but with UKAS calibration at -70, 0, +100 & +450°C
T100-450-1T	5 pin screw terminal fitted (suitable for F250 rear panel connection)
T100-450-1T-NAM	As above but with UKAS calibration at -70, 0, +100 & +450°C

AUTOMATIC SYSTEMS LABORATORIES

275 King Henry's Drive, New Addington,
Croydon, CR0 0AE, UK.

Tel: +44 (0)1689 800799

Fax: +44(0)1689 800405

email: sales@aslltd.co.uk

web: www.aslltd.co.uk